



MULTI-TONE HOOTER

FEATURES

- Aesthetic
- Highly responsive
- Universal voltage range
- High quality casing

CUTOUT

92mm



- Microcontroller Based Design
- Flush Mount
- 4 different tones will be heard one after the other when all alarms occur at same time.
- High Volume dB Sound output as compared to conventional buzzers.

FOR QUERIES

Visit us:

www.alindrelays.com

OR

Mail us:

contact@alindrelays.com

OR


Call us:

+91 944 600 5703

Specifications

- ➔ Input Supply Range: 70 – 110V DC (Inputs 1-3)
70 – 250V AC (input 4)
- ➔ Consumption: 25mA at 110V DC; 20mA at 230V AC
- ➔ Di Electric withstand: 2kV for 60 sec
- ➔ Loudness: >90dB
- ➔ Overall Dimension: 96 x 96mm

Connection Diagram

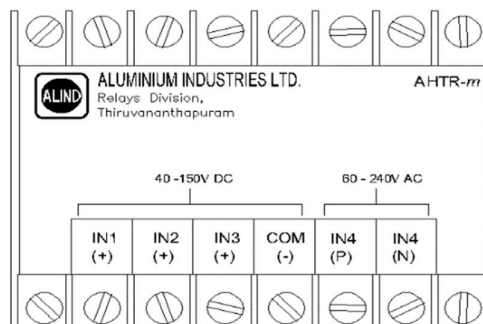

ALUMINIUM INDUSTRIES LIMITED

RELAYS DIVISION